


Data Centers Interoperability

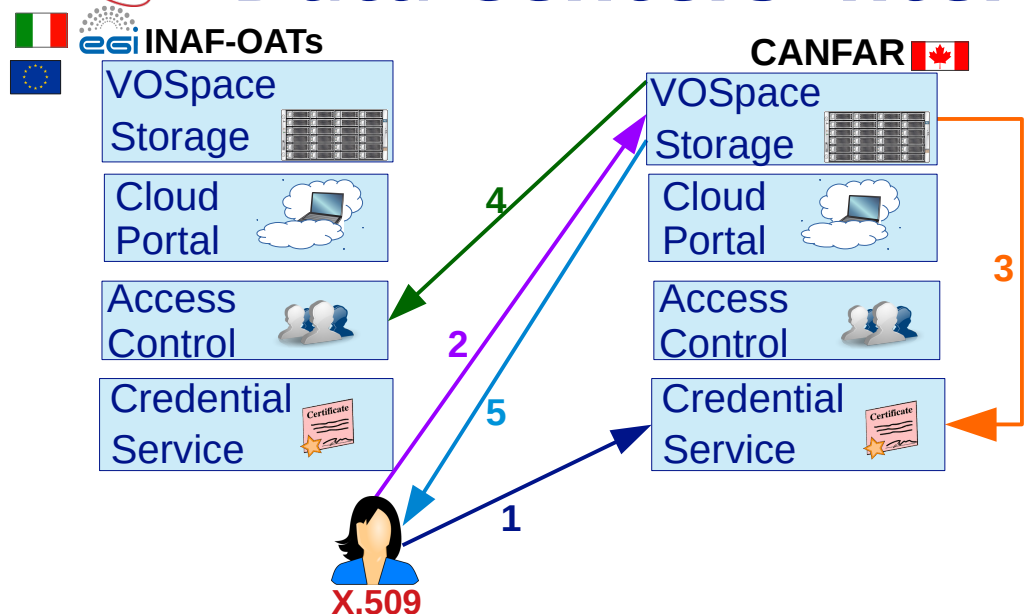

- 1) INAF-OATs user Bertocco delegates her x509 credentials to CANFAR Credential Service
- 2) user Bertocco asks for data of her INAF-OATs group to CANFAR storage service
- 3) CANFAR storage service gets the user's delegated credentials from the CANFAR Credential Delegation Service to be able to make calls to each other service on behalf of the initial user
- 4) CANFAR storage service checks the group affiliation of the user in the INAF-OATs group management service
- 5) CANFAR storage service returns data to the INAF-OATs user Bertocco

- X.509 : Alternatives ?
- Authorization granularity:
Federation level ?
Data Center level?